



PROTECH TOOLS

PIPE BEVELLING MACHINE



About Us

Protech Tools was founded in 2023 by a group of experts with 4 years of excellent work experience in the same field. After the initial years of struggle, through hard work, foresight, and persistence, the company has evolved from 2 persons to a dynamic workforce of over 10 individuals. They operate a single manufacturing unit and have established 5 sales and service offices in major cities of India. Currently, Protech Tools is focusing on the global market, aiming to deliver the same products with the best quality, competitive prices, and efficient delivery.

More Info

Phone: +91 9016860067

Email: PROTECHTOOLS3@GMAIL.COM

Address: GANDHIDHAM, KUTCH- GUJARAT 370201

Get Now



REGISTERED OFFICE

Office no – 02, 2nd Floor, Khodiyar Chamber,
Gandhidham – Kutch, Gujarat - 370201,
Tel No.: +91 9712926512 / 9016860067

Email: PROTECHTOOLS3@GMAIL.COM

AFTER SALES AND SERVICE CENTER

Ahmedabad

Mumbai

Ajmer

Jaipur

Mundra

MANUFACTURING FACILITIES

SHOP NO - 1 & 2, Ganesh nagar, Gandhidham - Kutch
Gujarat - 370201

PIPE BEVELLING MACHINES

PIPE 2



Drive	Electric	Pneumatic
Locking Range (mm)	20-42	20-42
Ideal Speed (RPM)	220	220
Torque (Nm)	42	30
Feeding Stroke (mm)	22	22
Pneumatic Power (HP)	-	0.55
Air Consumption (cfm)	-	18-20
Air Pressure (psi)	-	6 (90)
Air Hose Connection (bsp)	-	1/2"
Electric Power (watts)	850	--
Voltage (volt)	220/110	--
Frequency (Hz)	50	--
Max Noise Level (dB)	75	75
Weight (kg)	5.8	5.0

PIPE 3



Drive	Electric	Pneumatic
Locking Range (mm)	28-76	28-76
Ideal Speed (RPM)	80	115
Torque (Nm)	80	55
Feeding Stroke (mm)	40	40
Pneumatic Power (HP)	-	0.72
Air Consumption (cfm)	-	35-40
Air Pressure (psi)	-	6 (90)
Air Hose Connection (bsp)	-	1/2"
Electric Power (watts)	1000	--
Voltage (volt)	220/110	--
Frequency (Hz)	50	--
Max Noise Level (dB)	75	75
Weight (kg)	9.8	8.5

PIPE 4



Drive	Electric	Pneumatic
Locking Range (mm)	20-108	20-108
Ideal Speed (RPM)	80	70
Torque (Nm)	145	140
Feeding Stroke (mm)	40	40
Pneumatic Power (HP)	-	1.35
Air Consumption (cfm)	-	55-60
Air Pressure (psi)	-	6 (90)
Air Hose Connection (bsp)	-	1/2"
Electric Power (watts)	1000	--
Voltage (volt)	220/110	--
Frequency (Hz)	50	--
Max Noise Level (dB)	75	75
Weight (kg)	10.5	9.5

PIPE 6



Drive	Electric	Pneumatic
Locking Range (mm)	35-151	35-151
Ideal Speed (RPM)	80	50
Torque (Nm)	145	150
Feeding Stroke (mm)	40	40
Pneumatic Power (HP)	-	1.35
Air Consumption (cfm)	-	55-60
Air Pressure (psi)	-	6 (90)
Air Hose Connection (bsp)	-	1/2"
Electric Power (watts)	1000	--
Voltage (volt)	220/110	--
Frequency (Hz)	50	--
Max Noise Level (dB)	75	75
Weight (kg)	11.5	10.5


PIPE BEVELLING MACHINES

PIPE 8



Drive	Electric	Pneumatic
Locking Range (mm)	49-203	49-203
Ideal Speed (RPM)	35	50
Torque (Nm)	265	252
Feeding Stroke (mm)	40	40
Pneumatic Power (HP)	-	1.85
Air Consumption (cfm)	-	62-65
Air Pressure (psi)	-	6 (90)
Air Hose Connection (bsp)	-	3/4"
Electric Power (watts)	1100	--
Voltage (volt)	220/110	--
Frequency (Hz)	50	--
Max Noise Level (dB)	75	75
Weight (kg)	26.0	24.5

PIPE 12




Drive	Electric	Pneumatic
Locking Range (mm)	106-306	106-306
Ideal Speed (RPM)	30	35
Torque (Nm)	232	185
Feeding Stroke (mm)	50	50
Pneumatic Power (HP)	-	1.85
Air Consumption (cfm)	-	65-70
Air Pressure (psi)	-	6 (90)
Air Hose Connection (bsp)	-	3/4"
Electric Power (watts)	1100	--
Voltage (volt)	220/110	--
Frequency (Hz)	50	--
Max Noise Level (dB)	75	75
Weight (kg)	43.5	42.5

PIPE 24



Drive	Electric	Pneumatic
Locking Range (mm)	180-600	180-600
Ideal Speed (RPM)	12	12
Torque (Nm)	--	--
Feeding Stroke (mm)	50	50
Pneumatic Power (HP)	-	1.85
Air Consumption (cfm)	-	65-70
Air Pressure (psi)	-	6 (90)
Air Hose Connection (bsp)	-	3/4"
Electric Power (watts)	1100	--
Voltage (volt)	220	--
Frequency (Hz)	50	--
Max Noise Level (dB)	75	75
Weight (kg)	250	250


CUTTING BITS

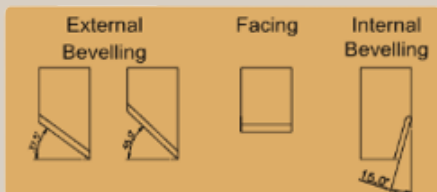


CUTTING BITS



CUTTING BITS

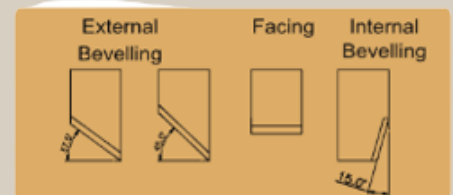

CUTTING BITS

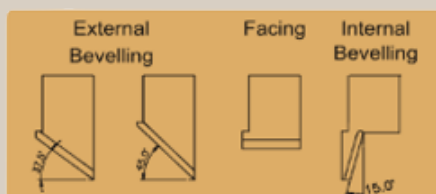

CUTTING BITS

